




Choose from mechanical galvanized or 300 series stainless steel options in 1-1/2", 2" or 2-1/2" sizes when looking to replace nails or screws that have failed. The sharp point drills easily and the oversized 5/8" EPDM washer seals tightly. Fasten aluminum panels effortlessly using the SS screw. Quick ship colors available or match to your roof color.

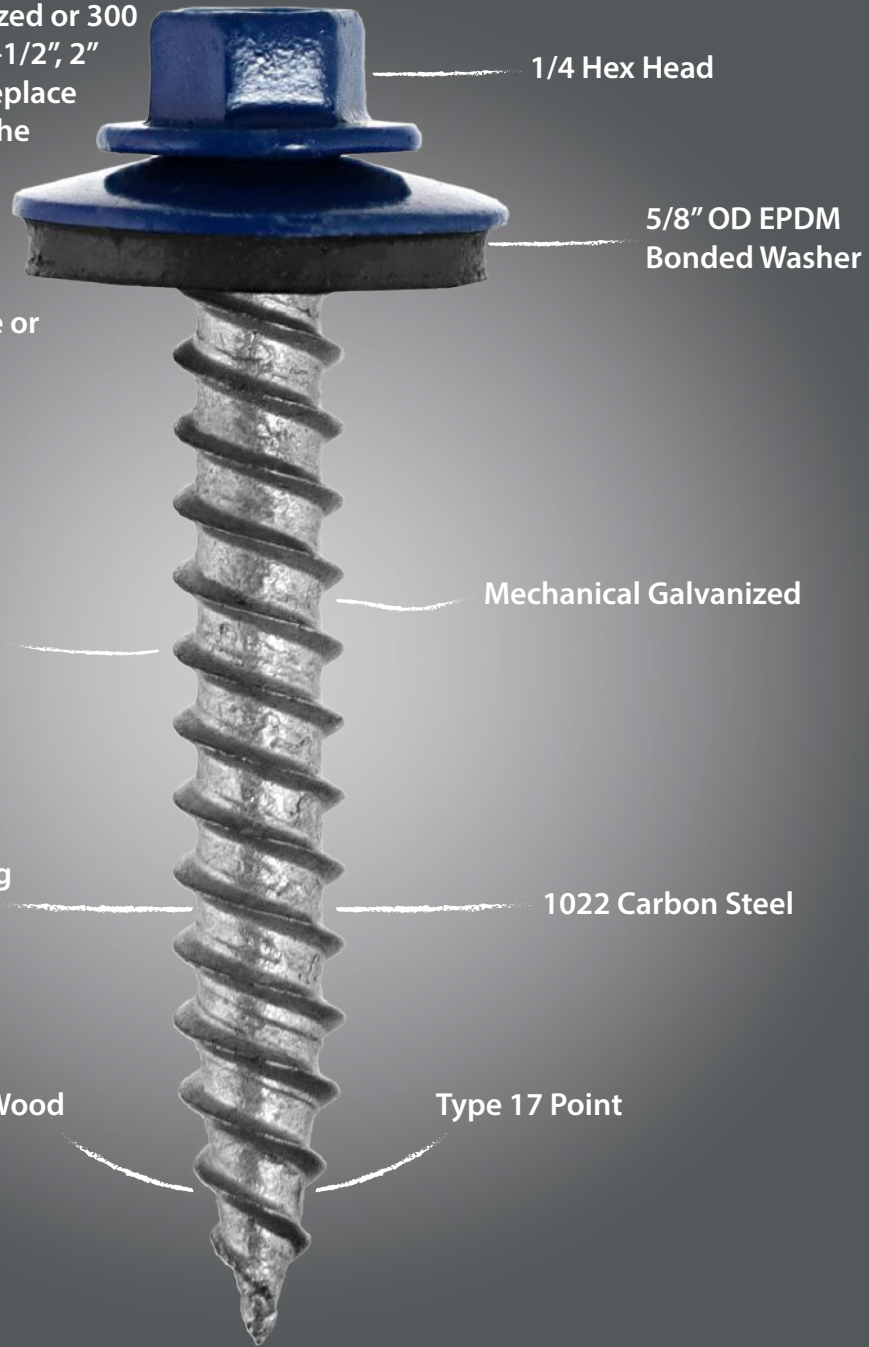

Great to Replace Failing Nails and Screws

Fastens Metal to Wood




Part#	Description	Head Style	Drill Point	Pcs/Bx	Lb/Box
12112RG	#12 x 1-1/2"	1/4 Hex	SP	2000	30.67
122RG	#12 x 2"	1/4 Hex	SP	1500	28.71
12212RG	#12 x 2-1/2"	1/4 Hex	SP	1000	22.69



EPDM Bonded Washer

Pull Out Strength	Substrate	Penetration	Pull Out Strength
	7/16" OSB	Full	189
	1/2" Ply	Full	302
	3/4" Ply	Full	545
	2 X Yellow Pine	1"	764
	2 X Spruce Pine Fir	1"	661
	2 X Spruce Pine Fir	1-1/2"	1,037



#12 Shank

Pull Over Strength	Substrate	Gauge	Thickness	Pull Over Strength
	AZ55 Galvalume	29	0.014	427
	AZ55 Galvalume	26	0.018	622
	AZ55 Galvalume	24	0.024	952



Sharp Point

Shear	Tensile	Torsional
2,650	3,332	157

**Also Available:**



**TuffGrip™**  
#12



**Fastgrip™**  
#14 Hi-Lo



**Fastgrip™**  
#10 Hi-Lo



**Fastgrip™**  
MINI-DRILLER™